

TX75X GUARD ALERT WITH REMOTE (SINGLE POINT GUARD MONITORING UNIT)



PROGRAMMING

1. THE FREQUENCY AND ACCOUNT CODE OF THE TRANSMITTER INSIDE THE UNIT ARE FACTORY PRESET.
2. THE REMOTE CONTROL IS FACTORY PROGRAMMED INTO THE UNIT.

SHOULD THE REMOTE GET LOST, DELETE ALL THE REMOTES BY

- PLACING A JUMPER ON THE 'F'ORGET PINS
- THE RED LAMP FLASHES 5 TIMES
- REMOVE THE JUMPER THEREAFTER

TO PROGRAM IN A NEW REMOTE


- PLACE A JUMPER ON THE 'L'EARN PINS
- PRESS THE RED BUTTON ON THE REMOTE TWICE
- (THE RED LAMP WILL FLASH TWICE)
- REMOVE THE JUMPER

3. CHANGE THE JUMPERS ON J2 AND J3 TO CHANGE THE COUNT DOWN TIME AS SHOWN.
4. INSERT THE JUMPER ON J5 IF YOU WISH TO RECEIVE PATROL COMPLETE OK MESSAGES.

DO NOT INSERT THIS JUMPER IF OPERATING ON AN FSK NETWORK.



TX75X JUMPERS

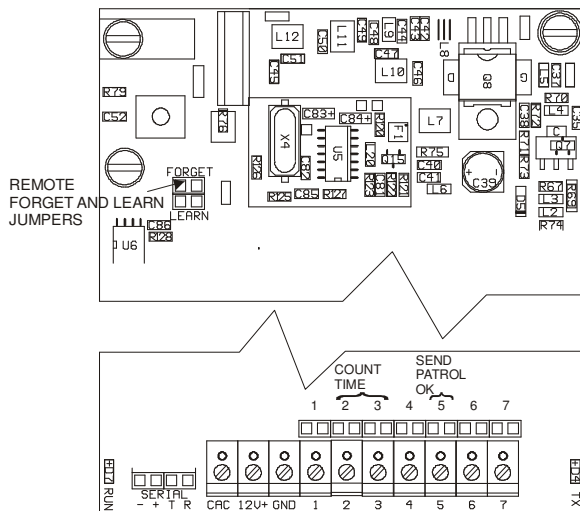


JUMPER SETTINGS

COUNT TIME	J2	J3
35 MINUTES	OFF	OFF
45 MINUTES	ON	OFF
60 MINUTES	OFF	ON
90 MINUTES	OFF	ON

SEND PATROL OK	J5
SEND PATROL COMPLETE	ON
DON'T SEND	OFF

TX75X GUARD ALERT

WIRING DIAGRAM

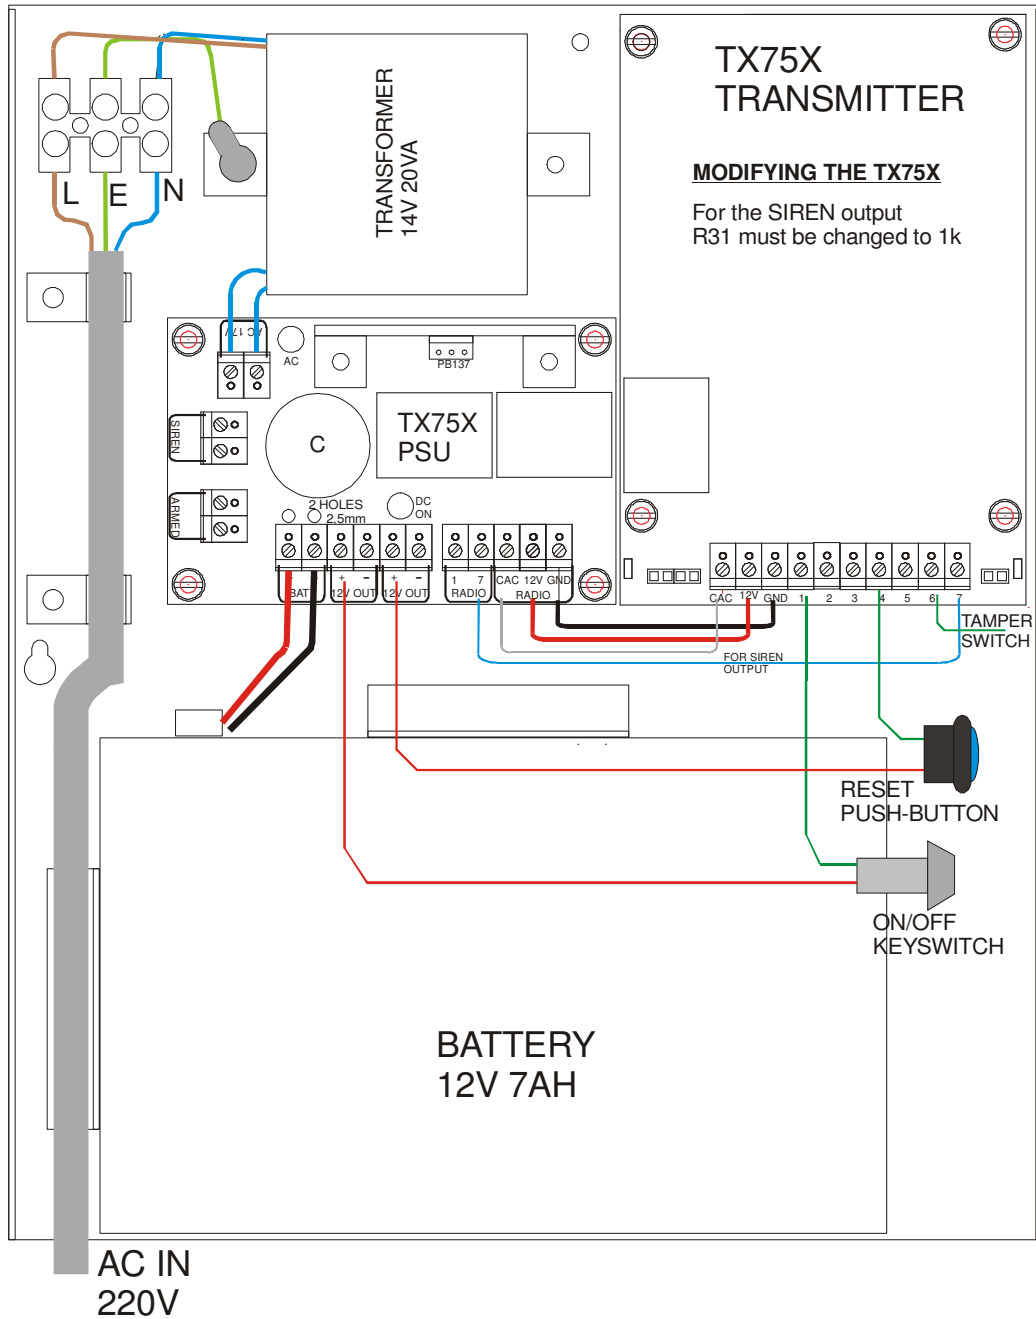



FSK TECHNICAL STANDBY NUMBERS:

FRANK : 082 657 7852

RICKUS : 072 595 7700